

TANSEL Measurement Guide

- ➔ Cabinet ref. (if more than one being measured) _____
- 1 Internal cabinet width (wall to wall): _____ mm
- 2 Internal cabinet depth (back to front edge): _____ mm
- 3 Internal cabinet height: _____ mm
- 4 Door obstruction: _____ mm
- 5 Hinge block thickness: _____ mm
- 6 Number of door(s): _____
- 7 If shelves fixed, distance in between: _____, _____, _____, _____ mm
- 8 Total number of shelves, inc. base of cabinet: _____

TIPS

- Don't measure an adjustable shelf
- Don't measure the shelf, it may be less than overall depth
- Remove adjustable shelves to maximise storage
- If your cabinet width measures, say 565mm, check again
- Hinge block thickness is very important to help us determine what clearances you need

“STANDARD” EXTERNAL CABINET WIDTHS

Cabinet/carcass walls use 16mm or 18mm. The majority of Australian made and flat pack cabinets are 16mm. Ikea® cabinets use 18mm board.





Examples (if 16mm board):

External	300	400	450	500	600	700
Internal	268	368	418	468	568	668

Email your measurements to info@tansel.com.au for product advice.

(02) 9440 9800

www.tansel.com.au

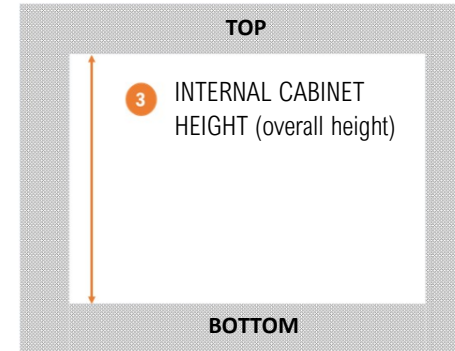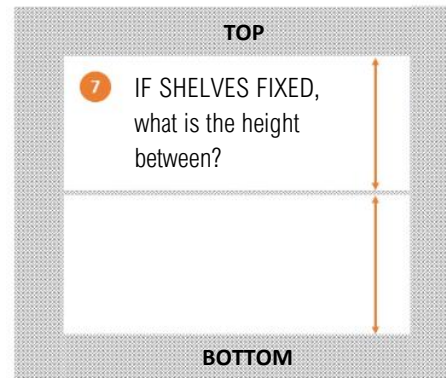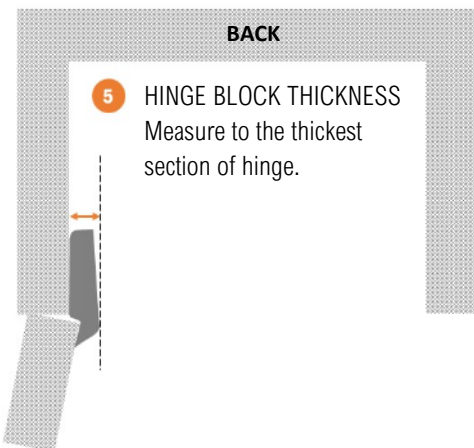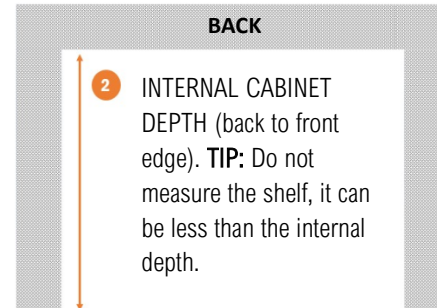

OTHER OBSTRUCTIONS?

If your cabinet has obstructions, like pipes or an irregular shape, please send a photo or provide hand sketch.

Also note if you have doors that do not fully open.